

City of Belton

Residential Construction Permitting Packet

Updated September 2016

Contents

ntroduction	4
Permit Application	7
Development Fee Schedule	9
Plot Plan Requirements/Checklist	13
_and Disturbance Permit	19
Right-of-Way Excavation Permit	.22
Concrete Mix Design Requirements	.25
Driveway Standard Detail	.27
Fire Sprinkler Option Information/Form	.30

Introduction to the City of Belton Residential Construction



City of Belton

NEW RESIDENTIAL CONSTRUCTION FORMS AND SUBMITTAL REQUIREMENTS

Submittal Information

- 1. A completed residential permit application
- 2. Plot Plan Two copies
 - 1) Follow the Plot Plan Requirements Checklist.
- 3. Right of Way Permit Application
 - 1) One copy Right-of-Way Excavation Permit
 - 2) One copy Right-of-Way Driveway/Sidewalk Permit
- 4. Building Plans Two sets
 - 1) One set will be returned to the permit holder for use on site.
- 5. Land Disturbance Permit
- 6. Fire Sprinkler Option

Permit, Codes & Inspection Information

<u>Permits</u> - Permits are good for a period of 12 months from date of issue. They may be extended without cost provided the *request for extension is received prior to the expiration date*. Any project that has no activity for a period of 180 days will be considered to be abandoned and will require a new permit to be issued.

<u>Subcontractors</u> - Permits must list all sub-contractors. The general contractor and each sub-contractor must be licensed with the City of Belton. Permits will not be issued until this is complete.

<u>International Residential Code</u> (IRC) - New Residential building construction is governed by the 2012 International Residential Code (IRC). Local amendments to the IRC can be referenced by going to the City of Belton website at <u>www.belton.org</u>. Select "Code of Ordinances" on left side of the homepage and choose "Unified Development Code". Reference Chapter 10, Article I.

The 2012 IRC incorporates several requirements for structural bracing and energy considerations not found in earlier codes. Older house plans may not include these features and may have to be updated.

<u>Unified Development Code</u> (UDC) - For information on setback requirements and allowed land usage, go to <u>www.belton.org</u>. Select Code of Ordinances / Unified Development Code, Chapter 6.

Landscaping - Chapter 22 of the Unified Development Code contains landscaping requirements. All landscaping must be complete before issuing a final Certificate of Occupancy (C of O). This section of the Code provides for a Temporary C of O in the absence of completed landscaping, by providing an escrow equal to 1 ½ times the cost to sod to be placed with the City of Belton, MO. Please reference this section for details of the Landscape escrow process.

Residential landscaping requirements for the City of Belton requires a minimum of one tree in the front yard area and one tree in the rear yard area for each dwelling.

Erosion Control - Erosion control is **required** for all disturbed soil areas. Mud and dirt tracked into the street must be cleaned off the street by the end of the day.

<u>Inspections</u> - An inspection request call line is provided to schedule inspections. Call 816-892-1260 to leave a voicemail inspection request by 4:30 p.m. the day **before** you need an inspection. Leave a contact name, the permit number, address of the job, the type of inspection being requested, and your preference for a morning or afternoon inspection. Call to schedule the inspection, but if circumstances change, please call Belton City Hall at 816-331-4331 and ask for Inspections to re-schedule or cancel.

If a deficiency is noted during an inspection, you are entitled to one re-inspection. If re-inspection finds the noted deficiency has not been corrected, there will be a \$42.00 re-inspection fee payable before any further inspections are made.

We welcome your project to the City of Belton and look forward to working with you.

Residential Permit Application



City of Belton 520 Main Street Belton, MO 64012 Phone: 816.331-4331 Fax: 816 331.6973

BUILDING PERMIT APPLICATION

RESIDENTIAL

The applicant warrants the truthfulness of the information in this application, and if any information provided is incorrect, the Building Permit may be revoked. Furthermore, if the permit is issued wrongfully, whether based on misinformation or on an improper application of the code, the Building Permit may be revoked. The signatory affirms that he/she is the owner of the subject property or is authorized by the property owner to perform the construction activities described in this application on behalf of the property owner.

If this application is for a shed or deck, see back of this form.

DATE:PHO	ONE #:	EMAIL:	
APPLICANT:			
APPLICANT ADDRESS:			
ADDRESS OF WORK:			
Description of Work:			
New Construction Only: L			
SUBCONTRACTORS	NAME	ADDRESS	PHONE
EXCAVATION		-	
FOUNDATION			
STEEL ERECTION			
PLUMBING			
SEWER / WATER			
ELECTRICAL			
HVAC			
INSULATION			
SIDEWALK/DRIVEWAY			
ROOFING			
OTHER			

Attach a list of any sub-contractors not shown in the above section.

THE GENERAL AND ALL SUB-CONTRACTORS ARE REQUIRED TO BE LICENSED BY THE CITY OF BELTON BEFORE THE PERMIT WILL BE ISSUED. ALL STRUCTURES MUST CONFORM TO THE CURRENT ADOPTED CODES AND ZONING ORDINANCES.

New construction may be subject to Impact Fees. Fees that may apply include: Building Permit, Right of Way Permit, Water Tap, Water Deposit, Street, Water & Sewer Impact Fees.

Development Fee Schedule



City of Belton, Missouri Schedule of Fees and Values – Updated 2016

PL	Αľ	N	ΙIΝ	IG	&	ZC	IIN	NG	APF	LI	CA	TI	ON	FEES	

Lot Split	\$200
Rezone:	
Residential	\$150
Commercial	\$200
Manufacturing	\$200
PUD	\$200
Special Use Permit	\$150
Variance	\$150

SUBDIVISION FEES

PRELIMINARY PLAT

Residential \$200 for 1^{st} 20 lots + \$10/lot thereafter Commercial \$300 for 1^{st} 40 acres + \$10/acre thereafter

FINAL PLAT

Residential \$200 for 1st 20 lots + \$10/lot thereafter Commercial \$300 for 1st 40 acres + \$10/acre thereafter

FIRE

Blasting Permit	State of Missouri Issued
Commercial Hoods	Check with Fire Marshal's Office
Fire Suppression Systems	Check with Fire Marshal's Office

RIGHT-OF-WAY PERMIT FEES

Service	Provider	Registration	\$19
---------	----------	--------------	------

Filing Fee

Base Permit Fee \$62 Street Cut Charge \$24

Linear Work Charge \$0.07/LF (2,000 LF per permit)

Re-inspection \$24
TRAFFIC CONTROL PERMIT FEES

Community Event \$10/day
Arterial Street \$24/lane/day
Collector Street \$18/lane/day
Local Street \$12/lane/day
MARKEY REGIONAL DETENTION PROGRAM

Optional "in-lieu of detention" program for eligible properties

charged at \$5,100 per impervious acre. See Chapter 32 of the Unified Development Code for details on eligibility.

BUILDING PERMIT FEES

Building permit fees based on valuation - minimum fee \$42

	- and the feet based on valuation minimal fee 542
<u>Valuation</u>	
\$1 to \$25,000	\$42 for first \$3,000 plus \$7.40 for each additional \$1,000 or fraction thereof, to & including \$25,000
\$25,001 to \$50,000	\$205 for first \$25,000 plus \$5.80 for each additional \$1,000 or fraction thereof, to & including \$50,000
\$50,001 to \$100,000	\$350 for first \$50,000 plus \$5.50 for each additional \$1,000 or fraction thereof, to & including \$100,000
\$100,001 to \$500,000	\$625 for first \$100,000 plus \$4.00 for each additional \$1,000 or fraction thereof, to & including \$500,000
\$500,001 to \$1,000,000	\$2,225 for first \$500,000 plus \$4.00 for each additional \$1,000 or fraction thereof, to & including \$100,000,000
\$1,000,001 and up	\$4.225 for first \$1.000,000 plus \$4.00 for each additional \$1.000 or fraction thorough

SANITARY SEWER CONNECTION FEES

Residential	\$47/trap min. charge of \$1,200
Commercial	\$59/trap min charge of \$2,000

WATER TAP FEES

Meter Size	Fee
3/4"	\$400
1"	\$482
1" w/ dual ¾"	\$540
1 1/2"	\$892
2"	\$1,120

Larger meters at current material costs.

WATER DEPOSIT

Builder \$110

LAND DISTURBANCE PERMIT

No fee except applicable Public Infrastructure Fees. Performance bond 100% of the construction cost. State MDNR Permits are required. See City LDP form for more information.

PUBLIC IMPROVEMENTS PERMIT

Review and Inspection fee	3% of construction cost
Performance and 2-year	100% of the construction cost

Maintenance Bond

IMPACT FEES

Arterial Street Impact Fee	\$620/PM Peak Hour Traffic Trip
Water Impact Fees	
Size	Amount

9.20	MITOUTE
3/4"	\$3,090
1"	\$4,944
1 ½"	\$6,180 / \$9,888
2"	\$12,360 / \$14,832
3"	\$18,540 / \$33,867
4"	\$24,670 / \$61,800
6"	\$61,800 / \$135,960



City of Belton, Missouri Arterial Street Improvements Impact Table – Updated 2016

Land Use Category	ITE Land Use Code	Land Use	Pass-by Factor	Impact Fee per Unit **
		Single Family Detached	100%	\$620.00
Measure: (Dwelling	220	Apartment	100%	\$384.40
Unit)	224	Rental Townhouse (2-3 units)	100%	\$446.40
	230	Condo/Townhouse (Owner Occupied)	100%	\$322.40
	240	Mobile Home Park	100%	\$365.80
	251	Senior Adult Housing - Detached	100%	\$167.40
	252	Senior Adult Housing - Attached	100%	\$155.00
	253	Congregate Care Facility	100%	\$105.40
	255	Continuing Care Retirement Community	100%	\$99.20
Commercial Unit: (Each	310	Hotel	75%	\$279.00
Room)	320	Motel	75%	\$218.55
Commercial/Retail Unit	444	Movie Theatre with Matinee	85%	\$2.00
of Measure: (Square	492	Health/Fitness Club	100%	\$2.19
Foot)	520	Elementary School	100%	\$0.75
	522	Middle School/Junior High School	100%	\$0.74
	530	High School	100%	\$0.60
	560	Church	90%	\$0.31
	565	Daycare Center	74%	\$5.66
	610	Hospital	77%	\$0.44
	620	Nursing Home	75%	\$0.34
	710	General Office Building	92%	\$0.85
	720	Medical-Dental Office Building	77%	\$1.70
	760	Research & Development Bldg.	92%	\$0.61
	770	Business Park	92%	\$0.72
	812	Building Materials/Lumber Store	81%	\$2.25
	813	Free Standing Discount Superstore	72%	\$1.94
	814	Variety Store	72%	\$3.04
	815	Free Standing Discount Store	83%	\$2.56
	816	Hardware/Paint Store	74%	\$2.22
	817	Nursery Garden Center	81%	\$3.49
	820 Shopping Center		66%	\$1.52
	826 Specialty Retail Center		49%	\$0.82
	841	Automobile Sales	79%	\$1.28
	843	Automotive Parts Sales	57%	\$2.11
	848	Tire Store	72%	\$1.58
	850	Supermarket	64%	\$3.76

Land use Category Use Cod		Land Use*	Pass-by Factor	Impact Fee Per Unit **	
Commercial/Retail Unit	851	Convenience Market-24 hours w/o pumps	39%	\$12.67	
of Measure: (Square	853	Convenience Market w/ pumps	34%	\$10.73	
Foot)	854	Discount Supermarket	77%	\$3.98	
Continued	857	Discount Club	61%	\$1.58	
	860	Wholesale Market	92%	\$0.50	
	861	Sporting Goods Superstore	60%	\$0.68	
	862	Home Improvement Superstore	52%	\$0.75	
	863	Electronic Superstore	60%	\$1.67	
	864	Toy/Children's Superstore	60%	\$1.86	
	866	Pet Supply Superstore	60%	\$1.26	
	867	Office Supply Superstore	52%	\$1.10	
	869	Discount Home Furnishing Superstore	47%	\$0.46	
	876	Apparel Store	55%	\$1.31	
	879	Arts and Craft Store	74%	\$2.85	
	880	Pharmacy/Drugstore w/o drive thru	47%	\$2.45	
	881	Pharmacy/Drugstore w/ drive thru	51%	\$3.13	
	890	Furniture Store	47%	\$0.13	
	896	Video Rental Store	61%	\$5.14	
	911	Walk-in Bank	80%	\$6.02	
	912	Drive-thru Bank	53%	\$7.98	
	925	Drinking Place	100%	\$7.03	
	931	Quality Restaurant	56%	\$2.60	
	932	High-Turnover (Sit-Down) Restaurant	57%	\$3.48	
	934	Fast-Food Restaurant w/ drive thru	51%	\$10.32	
	936	Coffee/Donut Shop w/o drive thru	53%	\$13.39	
	942	Automobile Care Center	83%	\$1.60	
Manufacturing /	acturing / 110 General Light Industrial		92%	\$0.55	
Industrial Unit of 120 General He		General Heavy Industrial	92%	\$1.23	
Measure: Square Foot)	130	Industrial Park	92%	\$0.48	
	140	Manufacturing	92%	\$0.42	
	150	Warehousing	92%	\$0.18	
	151	Mini-Warehouses	92%	\$0.15	
	152	High-Cube Warehouse/Distribution Center	92%	\$0.07	


^{*} Land Uses not identified shall be coordinated with City Staff, using the ITE Trip Generation Tables (9th Edition)

** Fee Calculated in accordance with Resolution No. 2005-50:

\$620.00 per trip based on weekday PM peak hours of the adjacent street traffic between 4 and 6 PM

NOTE: This list is not inclusive of all possible uses.

Plot Plan Requirements & Checklist



Phone: 816.331.4331 Fax: 816.331.6973

RESIDENTIAL PLOT PLAN REQUIREMENTS

1. Sealed by a registered Professional Engineer and/or Professional Land Surveyor licensed in the State of Missouri pursuant to Missouri State Law.

The plot plan must also include the following certification: "I, [Design Professional], certify that this plot plan has been field verified, and is in compliance with the approved subdivision grading plan unless otherwise noted."

2. Plan drawn to scale with North Arrow

The plot plan and all features shown on the plot plan must be drawn at a legible scale. The scale shall be 1" = 10' or 1" = 20' to provide clarity. The plan must also be on 11" X 17" format. Scales smaller than 1" = 20' are generally not acceptable, except for large lot developments.

- 3. Street Address, Subdivision Name (with Plat #), Lot and Block Number
- 4. Lot dimensions including all Easements

Include dimensions of front, side and rear yards. Show all easements within the lot. Easements should be labeled to include type of easement and dimensions. Easements must EXACTLY match those shown on the plat and/or dedicated by separate instrument.

Building Setback Lines

Show all building set back lines including side and rear yards with dimension and label.

6. Structures

Include location and dimensions of house and other accessory buildings. Where applicable locate and label retaining walls, wing walls, and fireplaces.

7. Paved Areas

Indicate location and dimensions of all proposed driveways, walks, patios, and other paved areas. Public sidewalks should be located along streets 6 feet behind the back of curb and 4 feet in width and in locations as noted in the approved subdivision grading plan. The slope of sidewalks shall be ½" per foot and shall drain to the curb.

Driveways must conform to the following:

- Driveway approach shall have a slope ½" per foot to the right-of-way line
- Driveway shall have a positive slope from garage floor to back of curb

- Minimum of 2 feet away from property lines
- Driveway wings must not extend beyond side property line extension including cul-de-sac lots
- Approach Minimum Width 12.0 feet
- Approach Maximum Width 25.0 feet
- Maximum Yard Area 35% of front yard area
- Maximum Width, Duplex Developments 35.0 feet
- Maximum Yard Area, Duplex Developments 50% of front yard area

8. Water Main, Sanitary and Storm Sewer structures (with elevations) and associated piping

Show BOTH sides of the street and the location of the public utilities including all piping adjacent to the lot and on either side of the street. Storm piping does NOT need to be shown.

9. Erosion Control Plan

Provide an erosion control plan in conformance with the APWA Single Family Residential Design Booklet. Provide silt fence around entire property, as necessary and ¾-inch rock on driveway area. Provide any additional erosion control measures necessary to prevent silt from leaving the site.

10. Site Utilities

Show the location of water service line and meter pit in Right-of-Way

- Water meter pit shall be located in the front of the building and 13 feet behind the back of curb measured to the front of the meter pit
- Top of meter pit shall be at an elevation of 1/2" per foot above the back of curb

Show the location of the existing sanitary sewer service wye (include elevations at the public main)

General Elevation Information

A. Top of Foundation

Include the top of foundation elevation

B. Egress Window

All houses WITHOUT walkouts shall indicate an egress window whose sill is a maximum of 44 inches above the basement floor elevation. The plan must indicate either the elevation of the window sill (44" maximum from floor) or the top of foundation wall at window (40" maximum from floor) and the top of the egress well where applicable

C. Floor

Include elevation of Basement Floor, Garage Floor, and Carport and Accessory building Floors where applicable. Garage Floor shall be a minimum of 1.3 feet (1.9 feet preferred) above the top of the back of curb elevation at the middle of the driveway. (16.0' @ $\frac{1}{2}$ " per foot [R-O-W line] + 30.0' @ $\frac{1}{4}$ " per foot [building setback line])

D. Top of finish curb at points of extension of lot lines and middle of driveway.

Elevation shall conform to the approved as-built grading plan, and with the top of curb elevations indicated on adjacent lots. Tolerance +/- 0.1 foot. Include elevation of the middle of the driveway approach at the right-of-way line.

E. Public/Private Infrastructure

Provide elevations on all public and private infrastructure. (i.e. manholes, valve boxes, storm inlets, etc.)

- F. Existing and finish grade at each corner of lot and at each principal corner of structure.
- G. Finish grade at both sides of abrupt changes of grade such as retaining walls, slopes, etc.
- H. Walkouts and daylight windows

Indicate acceptable location and theoretical minimum low opening (if applicable)

11. Grading Plan (In addition to Elevation Information as listed above)

- Maximum contour interval of 2 feet
- Conform with approved as-built grading plan AND adjacent approved plot plans
- Grades at right-of-way must match typical street cross-section (i.e. ½-inch per foot slope)
- Must match adjacent property grades (+/- 0.1 foot vertical tolerance except where otherwise more restrictive) and/or approved subdivision grading plan.
- Minimum allowable slope 2%
- Maximum allowable slope 3:1
- Indicate High Point location and elevation at gradient breaks
- For retaining walls, indicate grade at both top and bottom of wall at both ends of wall and at 25 foot maximum intervals along the wall
- Include additional elevation benchmarks necessary to stake and check grading as necessary

12. Additional requirements if lot is governed by a Single MLO:

A. Minimum Low Opening (MLO)

Indicate a single MLO for the entire structure based on the FIRM elevation, flood study, lake, or MLO set by the Design Engineer. The MLO must be based on the appropriate freeboard at the most upstream point on the property. The design engineer has the discretion to set the MLO higher than the minimum required by the City. The MLO applies to any opening in the foundation AND the foundation wall itself. The minimum freeboard requirement is the greater of the following:

- FEMA: 100-year Base Flood Elevation (water surface) plus 2.0 feet
- Flood Study: 100-yeat Energy Grade Line (EGL) plus 1.0 foot
- Lake: 100-yeat Surface Elevation plus 1.0 foot
- Design Engineer: Use MLO as set by Design Engineer
- SPECIAL NOTE: If the BUILDING FOOTPRINT ITSELF lies within the 100-year FIRM boundary, the freeboard is 2.0 feet above the BASEMENT FLOOR, not the low openings in the foundation.

B. 100-year floodplain elevations

Show 100-year Energy Grade Line (EGL) for FEMA regulated streams, flood studies, and lakes at affected property corners. For these types of floodplains, the UPSTREAM PROPERTY CORNER EGL governs for house opening elevations.

13. Additional requirements if lot contains, or is adjacent to an Engineered Drainage swale:

A. Minimum Low Opening (MLO) for Engineered Swale

MLO elevation for swales can be indicated for individual openings, individual wall sections, OR for an entire structure. If indicated for the entire structure, the governing MLO must be based on the swale EGL as measured perpendicular to the UPSTREAM CORNER of the house.

If the intent is to assign individual MLO elevations for each opening, ALL individual openings must be clearly indicated, and the MLO must be based on the EGL of the swale perpendicular to the upstream side of the opening

Swale "TYPICAL" Cross Section

Include typical cross-section labeled as per the section cut designated on the swale. The typical section should include the design flow, dimensions, 100-year flood depth, 100-year EGL, and minimum slope.

B. Swale Elevations at Critical Locations

Include swale flowline and 100-year EGL at critical locations. These include the upstream side of structure openings, perpendicular to house corners, changes or stair stepping in the foundation wall height, and intersections with property lines of ALL adjacent lots. Do NOT call out MLO's at locations where there are not openings, EXCEPT where they will be applied to the entire structure. MLO's should be called out ONLY where an elevation inspection will occur. NOTE: The top of foundation WILL be considered an MLO if there is no other opening along that side of the structure and an elevation inspection WILL occur there.

C. Limits of swale on plan

Indicate the specific location and limits of the swale on the plan. Label the swale as required above. If the swale is located outside of the limits of the drawing, but it's elevations still impact the site, include a note indicating "Engineered Swale is located [direction and distance] from the subject property.

14. Water Resistant Window Wells (where required)

Call out the location and top of concrete window well elevation for any required Water Resistant Window Wells (WRWW). WRWW's are required for the following conditions:

When the FEMA Base Flood Elevation plus 2 foot freeboard area is within 25 feet of the window well. If the edge of an engineered swale is closer to the window well than 10 feet AND the swale side slope is steeper than 3:1 or is vertical.

IF the design 100-year flow in the swale exceeds 50 cfs AND the edge of the swale (at the 100-year water surface) is less than 15 feet from the window.

CITY OF BELTON - PLOT PLAN REQUIREMENTS CHECKLIST

The applicant shall submit a Plot Plan showing the locations of the proposed structure on the lot to the City of Belton at the time of the building permit application. This Plot Plan shall be certified by a person licensed by the Missouri Board of Architects, Professional Engineers and Professional Land Surveyors.

DP	City	The plot plan should contain at a minimum:	
Cert	Cert		Dept
		Sealed by a Registered Professional Engineer or Land Surveyor	Bldg
		Grading Plan Certification Statement	Bldg
		Style/Type of house labeled	Bldg
		1"=20 Scale, 11" X 17" Format, North Arrow	Bldg
		Subdivision Name w/ Plat Number, Block Number, and Lot Number	Bldg
		Lot Dimensions including easements	Bldg
		Building Setback Lines - including side and rear yard dimensions	Bldg
		Location and dimensions of house and accessory building	Bldg
		Located and Labeled: Retaining Walls, Wing Walls, Fireplaces (If outside sill plate)	Bldg
		Retaining wall elevation shown @ top and bottom, 25' interval	Bldg
		Indicated location of all proposed paved areas (driveways, walk, patios, etc.)	Bldg
		Sidewalk 6' behind back of curb and 4' wide (1/2" per foot slope)	Bldg
		Driveways:	Bldg
		1/2" per foot slope in ROW	Bldg
		2' away from property line	Bldg
		Driveway wings do not extend beyond extension of property line	Bldg
		Approach: Minimum Width: 12.0' Maximum: 25.0'	Bldg
		Driveway not more than 35% of front yard area	Bldg
		Temporary 3/4" gravel construction driveway called out	Bldg
		Public street shown (both sides)	Bldg
		Egress window shown w/ elevation (All houses WITHOUT walkouts)	Bldg
		Elevations for garage floor, basement floor, carport & accessory building	Bldg
		Garage floor is a minimum of 1.3' above the top of back of curb @ middle of driveway	Bldg
		Top of finish curb shown @ extension of lot lines and middle of driveway	Bldg
		Elevation @ middle of driveway approach shown at ROW line	Bldg
		Existing and finish grade shown at corners of lot and corner of house	Bldg
		Elevation of walkout and daylight windows	Bldg
		Top of foundation elevation shown	Bldg
		Public water main shown including fire hydrants and valves	Engr
		Public sanitary sewer main shown w/ elevations on structures	Engr
		Public storm sewer structures shown w/ elevations	Engr
		Private water service line and meter pit (shown in ROW only) (13' behind curb)	Engr
		Sanitary sewer service wye location shown with elevations	Engr
		Theoretical Minimum Low Opening (MLO) shown when applicable	Engr
		Grading Plan:	Engr
		Existing and proposed contour shown @ max. 2' interval (1' interval may be necessary)	Engr
		Grading plan conforms to approved as-build grading plan & adjacent plot plans	Engr
		Proposed grading plan matches existing grades at lot lines or approved adjacent plot plans	Engr
		Min. allowable slope - 2% Max. allowable slope - 3:1	Engr
		High point elevation indicated and labeled	Engr
		Sediment and erosions controls	Engr
		Design Professional:	
Permit	t #	Address	

Note: Additional Requirements if lot contains, or is adjacent to and engineered drainage swale

Land Disturbance Form



CITY OF BELTON, MISSOURI

Land Disturbance Permit (Less than 1 Acre)

PROJECT NAME:	•
LAND DISTURBANCE AREA (Acres):	
PROPOSED CONSTRUCTION START DATE:	
ESTIMATED CONSTRUCTION COMPLETION DATE:	

By signing this permit letter, you agree to adhere to all regulations, fines, penalties, and stop work orders as listed below and any regulation listed in section 36.110 (j) of the subdivision regulations.

- 1. Install silt fence and/or other approved erosion control measures around the area you are grading.
- 2. Install silt fence and/or other approved erosion control measures 24 hours before grading operations begin.
- 3. Plant vegetation within 3 days and establish vegetation in this area within 30 days after the final grade is established.
- 4. Install a temporary gravel construction entrance prior to any excavation on the site.
- 5. Inspect and repair all silt fence and other sediment/erosion control devices after each rain event. You must remove mud and debris in the street.
- 6. Inspect and repair all silt fence and other sediment/erosion control devices on a weekly basis.
- 7. No building inspection shall be requested until all sediment/erosion control devices are installed.
- 8. If you fail to control sediment, silt, dust or sediment flows into nearby creeks, ponds, storm inlets, swales, streets, adjacent lots or sewer pipes, you will be fined and issued a stop work order by a codes enforcement officer.
- 9. A stop work order, penalty or fine for failure to maintain and install sediment/erosion controls can be issued.
- 10. Each lot must have a gravel construction entrance.
- 11. If required, you or the developer will apply for the 1 acre permits from MDNR and City of Belton and complete the SWPPP.
- 12. The City may require the contractor or developer to install additional sediment or erosion controls as needed.

Acceptance of Co	onditions:	
OWNER: (If applicable)	Name	
	Address	
	Phone Contact	
	Signature	Date
CONTRACTOR: (REQUIRED)	Name	
	Address	
	Phone Contact	
	Signature	Date
APPLICATION AP	PROVED:	
DATE		CITY ENGINEER or AUTHORIZED REPRESENTATIVE

Right-of-Way Excavation Forms



EMAIL:

CITY OF BELTON 520 Main Street Belton, MO 64012 (816) 331-4331 Fax: (816) 331-6973

PERMIT FOR WORK ON CITY RIGHT-OF-WAY, CITY EASEMENT, OR CITY PROPERTY

						PLE	TED BY CITY	STAFF
				PERMIT N				
				PERMIT IS	SUE DATE			
DATE OF APPLICATION:					□ FAX		□ EMAIL	□ WALKIN
PERMIT LOCATION/STREET	Γ ADDRES	S:				1000		
MISSOURI ONE CALL TICKE THE USE OF INDUSTRY STANDARD U			IS REQUIRED.					
TYPE OF WORK								
□ WATER □ GAS			□ WASTI	EWATER			WATER/SEW	ER SERVICE
□ CATV	□ ELECT	RIC	□ сомм	IUNICATIO	NS		DRIVEWAY	
□ SIDEWALK	□ OTHE	R (please specify)	3370			109		
CONTACT INFORMATION	N							
CONTRACTOR/APPLICANT	CONTRACTOR/APPLICANT:							
CONTACT NAME:								
ADDRESS:								
CITY:		STATE:	ZIP:					
TELEPHONE:			CELL PHONE:					
EMAIL:								
OWNER OF FACILITIES (UTI	LITY COM	IPANY):						
CONTACT NAME:								
ADDRESS:					Historia de			
CITY:		STATE:			ZIP:			
TELEPHONE:			CELL PHONE:					
EMAIL:								
SUBCONTRACTOR (IF APPLICABLE):								
CONTACT NAME:								
ADDRESS:				***				
CITY:		STATE:			ZIP:			
TELEPHONE:			CELL PHONE:					

Updated: July 21, 2016

PERMIT FOR WORK ON CITY RIGHT-OF-WAY, CITY EASEMENT, OR CITY PROPERTY City of Belton, Missouri

DETAILS OF WORK						
ESTIMATED START DATE		ESTIMAT DATE	TED COMPLETION			
	THE PERMIT TERM SH	IALL NOT E	EXCEED 60 DAYS.			
PURPOSE OF WORK	□ REPAIR	□ REPLACEMENT		□ NE	W INSTALLATION	
PURPOSE OF WORK	□ OTHER (please specify)					
INICTALLATION MATTLOD	□ OPEN CUT		☐ TUNNELING/BO	RING		
INSTALLATION METHOD	□ OTHER (please specify)					
	□ PAVEMENT	□ GRASS	5	□ cu	RB	
AFFECTED AREA	□ SIDEWALK	□ DRIVE	WAY	1	THOLES/SPOT HOLES VEMENT	
AFFECTED AREA	☐ SERVICE CONNECTION ACROSS STREET	The state of the s				
	☐ AREIAL/POLE MOUNTED ☐ OTHER:					
LENGTH IN FT (IF LINEAR V	VORK):	FROM		то		
TH	IE MAXIMUM LENGTH OF LINE	AR WORK	PER PERMIT IS 2,000	FEET.		
OTHER DETAILS						
TOTAL DISTURBED AREA*:	S	Q. FT		A	CRES	
THE FOLLOWING ARE ACKI PER CITY'S ROW ORDINAN	NOWLEDGED AND/OR ATTAC CE:	HED AND	NCORPORATED INTO	THIS F	PERMIT APPLICATION,	
□ REGISTRATION						
☐ TEMPORARY TRAFFIC	CONTROL PERMIT, AS APPLIC	CABLE				
☐ LAND DISTURBANCE	PERMIT, AS APPLICABLE	- 10		-		
	INGS, CONSTRUCTION PLANS, ACILITIES AT SUCH LOCATION	ETC. SHOV	VING THE LOCATION	AND AF	REA OF PROJECT AND	
☐ WORK PLAN AND SCH	HEDULE					
□ PERFORMANCE AND	MAINTENANCE BONDS, AS AP	PLICABLE				
☐ APPROPRIATE FEES W	VILL BE PAID UPON ISSUANCE	OF PERMI	Γ			

Page 2 of 3 Updated: July 21, 2016

PERMIT FOR WORK ON CITY RIGHT-OF-WAY, CITY EASEMENT, OR CITY PROPERTY City of Belton, Missouri

PERMIT FEE CALCULATION (TO BE COMPLETED BY CITY STAFF)	
PERMIT FEE = BASE PERMIT FEE + ([LINEAR WORK FEE] X [FEET]) + ([STREET CUT FEE] X [# OF STREET CUTS])	
TOTAL PERMIT FEE:	

This application is made under the terms of Chapter 19 of the Code of Ordinances of the City of Belton, Missouri, governing work within public right-of-way, to accomplish the work herein described. Applicant hereby agrees to perform said work and restoration of right-of-way in strict accordance with the provisions of said Chapter 19 and further agrees to satisfactorily repair any failure or damage within the right-of-way resulting from the excavation or construction covered under this application within four years thereafter.

Pursuant to Chapter 19 of the Code of Ordinances, re-inspection fees will be applied separately if determined necessary by the City Inspector.


The permit is valid for 60 days from the date of the Permit Issue Date.

SIGNATURE REQUIRED	
PERMITTEE OR AUTHORIZED AGENT	CITY ENGINEER OR HIS OR HER DESIGNEE
SIGNATURE	SIGNATURE
PRINTED NAME	PRINTED NAME
DATE	PERMIT ISSUE DATE

City of Belton Concrete Mix Design KCMMB 4K

2008 Edition


	Mix KCMMB 5K	Cement 660	Slag/ash 25%	Aggregate Granite/ Quartz	<u>Slump</u> 2 - 4	W/C Ratio 0.40	Break 6,200	<u>Air</u> 5-8
	KCMMB 4K	600	25%	Granite/ Quartz	2-4	0.44	5,200	. 5-8
•	KDOT Concrete for Pavement, Air Entrained	602	0-20%	Limestone.	<2.5	0.49	600 Flexual	>5
	KDOT Grade 4.0	602	0-25%	Limestone	2-4	0.44	5,200	5-8
	KDOT Grade 3.5	564	0-25%	Limestone	2 - 4	0.46	4,600	5-8

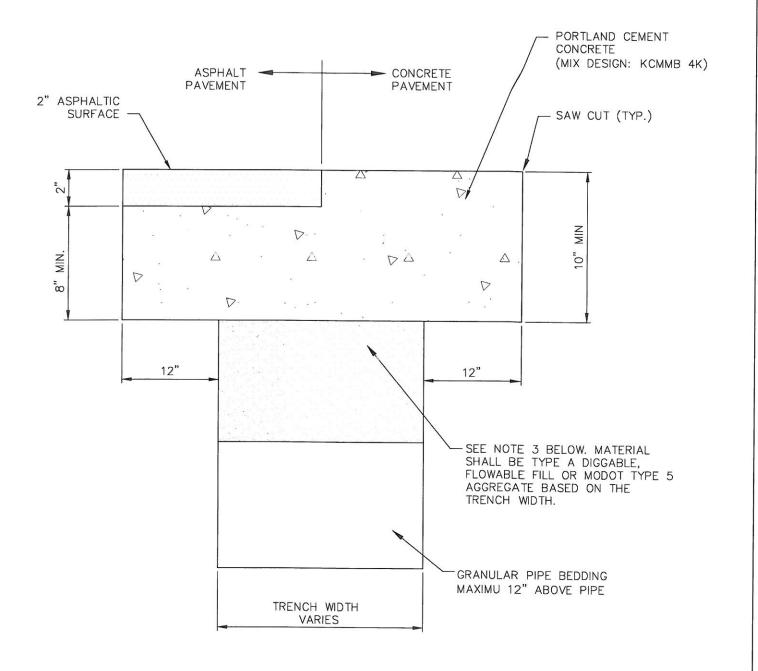

STREET CUT REPAIR


NOTES:

- ASPHALT PAVEMENT PORTLAND CEMENT CONCRETE TO BE 8" MIN. DEPTH OR MATCH EXISTING PAVEMENT THICKNESS, WHICHEVER IS GREATER.
- 2. CONCRETE PAVEMENT PORTLAND CEMENT CONCRETE TO BE 10" MIN. DEPTH OR MATCH EXISTING PAVEMENT THICKNESS, WHICHEVER IS GREATER.
- 3. IF THE TRENCH WIDTH IS LESS THAN 24-INCHES, IT SHALL BE BACKFILLED WITH FLOWABLE FILL. FLOWABLE FILL MIX DESIGN TO BE APPROVED BY THE CITY PRIOR TO PLACEMENT.




STREET CUT REPAIR

SCALE:	NO SCALE	. 04-11-16 CORRECTION TO NOTE	Ē
DETAIL NO:	STR-007	NE N	_
DATE:	03-16-15	14	_

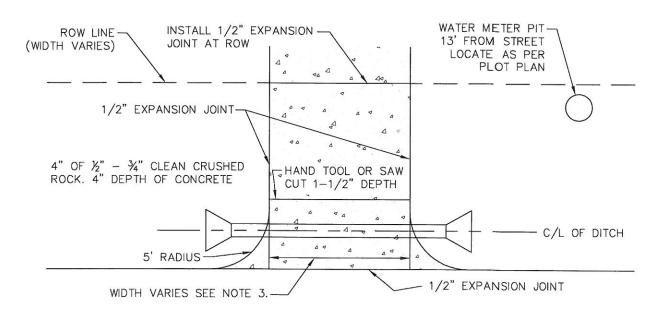

½' SLOPE FROM STREET TO ROW LINE

PLAN

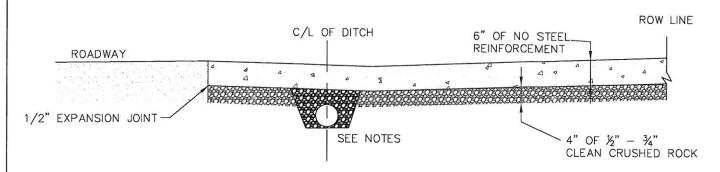

SECTION

RESIDENTIAL DRIVEWAY APPROACH WITH NO CURB

NOTE:

- 1. IF NEW CONSTRUCTION, MAXIMUM DRIVEWAY APPROACH SLOPE IS 2%. IF REMOVING AND REPLACING, MATCH EXISTING SLOPE.
- 2. CITY CONCRETE MIX DESIGN SHALL BE KCMMB 4K.
- 3. THE DRIVEWAY WIDTH SHALL BE IN ACCORDANCE WITH SECTION 26-5 OF THE CITY'S UNIFIED DEVELOPMENT CODE.
- THE MINIMUM SIZE OF THE STORM DRAINAGE PIPE SHALL BE 12 INCHES IN DIAMETER AND AS DIRECTED BY CITY ENGINEER OR DESIGNEE.
- DRAINAGE PIPE SHALL BE EITHER 16-GAUGE CMP OR CLASS III RCP.
- 6. PIPE SHALL BE OF LENGTH THAT THE SIDE SLOPE FROM THE EDGE OF THE DRIVE TO THE DITCH LINE CAN BE MAINTAINED ON A THREE TO ONE RATIO.
- 7. FLARED END SECTIONS OR HEADWALLS MANUFACTURED FOR SUCH PURPOSE AND APPROVED BY THE CITY ENGINEER SHALL BE INSTALLED ON THE ENDS OF DRIVEWAY STORM DRAINAGE PIPES.
- THE PIPE SHALL EXTEND NO MORE THAN 5 FEET BEYOND THE DRIVE OPENINGS IN ADDITION TO THE FLARED END SECTIONS.
- THERE SHALL BE MAINTAINED A MINIMUM OF 6 INCHES OF FILL OVER THE TOP OF THE DRAINAGE PIPE.

2015 Details




City of BELTON

Missouri


RESIDENTIAL APPROACH WITH NO CRB

SCALE:	NO SCALE	Τ.	7-14-15	CREATED.
DETAIL NO:	STR-018	72		
DATE:	03-16-15	7~		

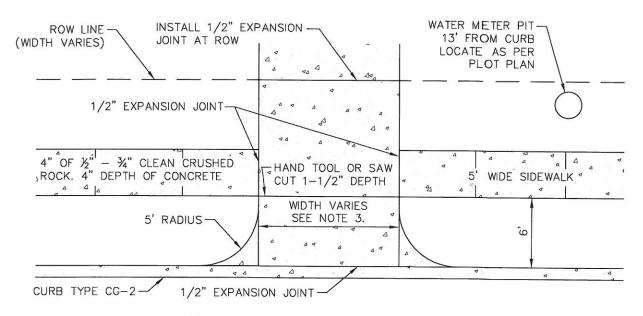

1/2' SLOPE FROM BACK OF CURB TO ROW LINE

PLAN

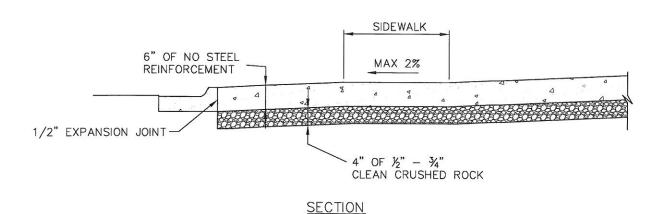

RESIDENTIAL DRIVEWAY APPROACH

NOTE:

 IF NEW CONSTRUCTION, MAXIMUM DRIVEWAY APPROACH SLOPE IS 2%. IF REMOVING AND REPLACING, MATCH EXISTING SLOPE.

CITY CONCRETE MIX DESIGN SHALL BE KCMMB 4K.
 THE DRIVEWAY WIDTH SHALL BE IN ACCORDANCE WITH

SECTION 26-5 OF THE CITY'S UNIFIED DEVELOPMENT CODE.



2015 Details

BELTON

Missouri

RESIDENTIAL APPROACH

SCALE:	NO SCALE		7-14-15	NOTES.	
DETAIL NO:	STR-017	REV			201
DATE:	03-16-15	78			

Fire Sprinkler Option



Fire Prevention Bureau

Home Fire Sprinkler Systems

Missouri state law requires that purchasers of new homes be offered the option of installing a home fire sprinkler system.

When you purchase a new home, one of the most important decisions you will make is whether or not to install a home fire sprinkler system. A United States Fire Administration report shows that your chances of dying in a home fire are reduced by 82% when you have working smoke alarms and a home fire sprinkler system. Property losses from fires also drop dramatically to an average of \$2,166 in homes with fire sprinklers, down from an average of \$45,019 in homes without them according to a 15 year study of fires in homes in Scottsdale, AZ, where most homes have fire sprinklers.

This sheet is designed to answer common questions homebuyers have about home fire sprinkler systems.

I have smoke alarms, isn't that enough? Smoke alarms are a critical tool in protecting you and your family, but they only notify you of a fire. Home fire sprinklers are designed to actually control the fire allowing you time to escape. Many times, the fire is extinguished before the fire department even arrives.

But what about water damage? A home fire sprinkler system uses a small fraction of the water used by firefighter's hoses and only the sprinkler closest to the fire activates. Remember, almost everything will dry out, nothing will "unburn"!

Aren't fire sprinklers ugly? Home fire sprinklers are much smaller than their commercial counterparts. Also, home fire sprinklers can be installed with cover plates that come in a variety of colors. Those cover plates conceal the sprinkler until it is activated by a fire.

Will my insurance rates be affected? Many insurance companies offer discounts of up to 30% for home fire sprinkler systems. Contact your agent for more information.

How expensive are home fire sprinkler systems? Studies show that the national average for home fire sprinkler systems is \$1.61 per square foot. Your builder can provide you specific pricing information for your situation.

Where can I get more information on home fire sprinkler systems? The Home Fire Sprinkler Coalition has an excellent informational website. To visit it, go to www.homefiresprinkler.org. Of course, you can always contact the Belton Fire Department, Fire Prevention Bureau at (816) 331-7969 for more information.





City of Belton – Belton Fire Department Residential Fire Sprinkler Option Form

Congratulations on the purchase of your new home!								
MO State law requires that the purchaser of a new home be offered the option of a residential								
sprinkler system. This form is part of that "mandatory option" requirement.								
Question	Yes	No						
1. Was the option of installing a residential fire sprinkler system offered to you?								
2. Were you provided with educational materials on residential fire sprinkler systems?								
3. Did you choose to purchase a residential fire sprinkler system for your new home?								
If not, what was the reason for the decision? (circle one)								
Cost Don't feel it's necessary Maintenance concerns Unce	rtainty							
4. Type of home purchased: (circle one) Ranch Two-story Other:								
Basement? (circle one) Yes No								
5. Price of fire sprinkler system:								
6. Size of home in livable square feet:								
7. Home constructed for: (circle one) Customer Inventory								
8. Have you ever seen a fire sprinkler demonstration?								
9. Do you understand that only the sprinkler closest to the fire activates?								
Purchaser Name: Date:								
Purchaser Address: Purchaser Phone:								
Purchaser Signature: Building Company:								
ruiciosei alginature.								

A copy of this form shall be included with the information submitted to obtain a building permit from the City of Belton. For questions call the Fire Marshal's Office at (816) 331-7969.

Thank you!